


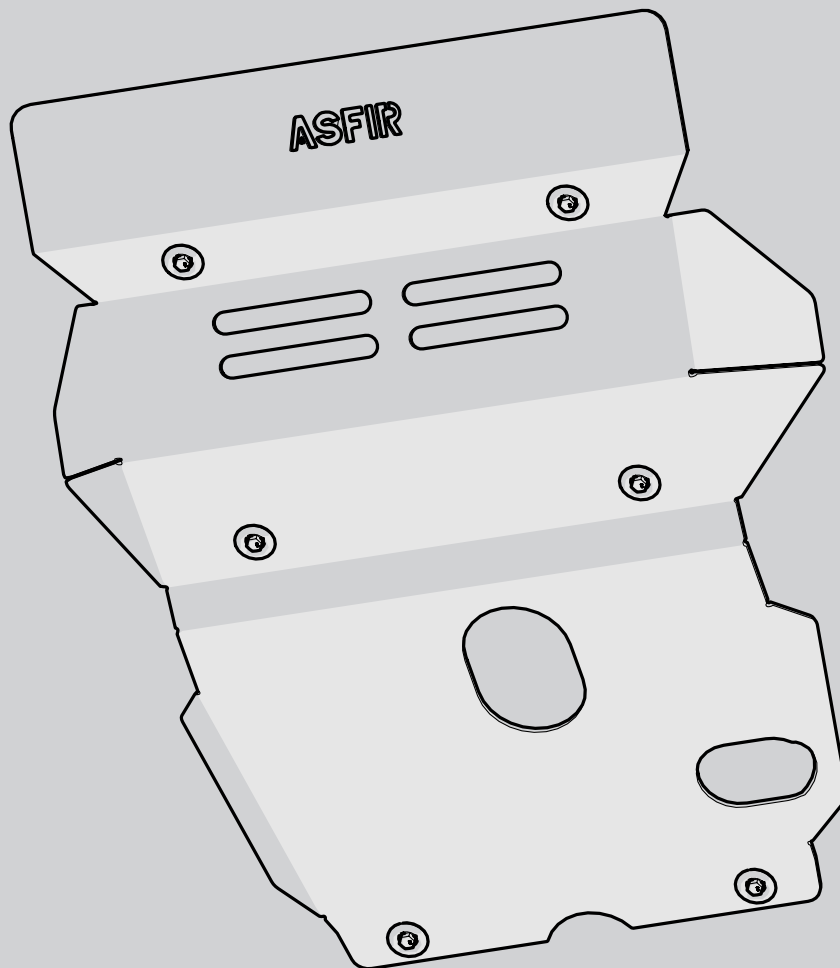


Front skid plate Mounting instructions for Toyota Hilux 2018




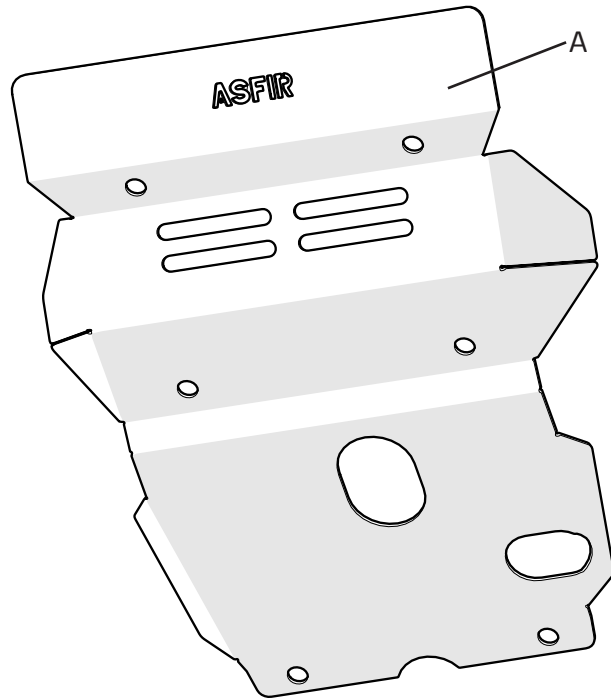

Hex bolt M8x25





Spring washer 8

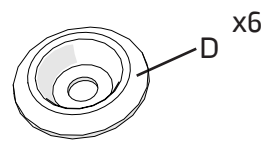


Pocket washer 8



Maximum Tightening Torques

M8(8.8)	25 Nm
---------	-------

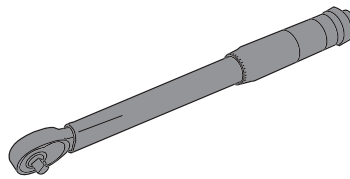


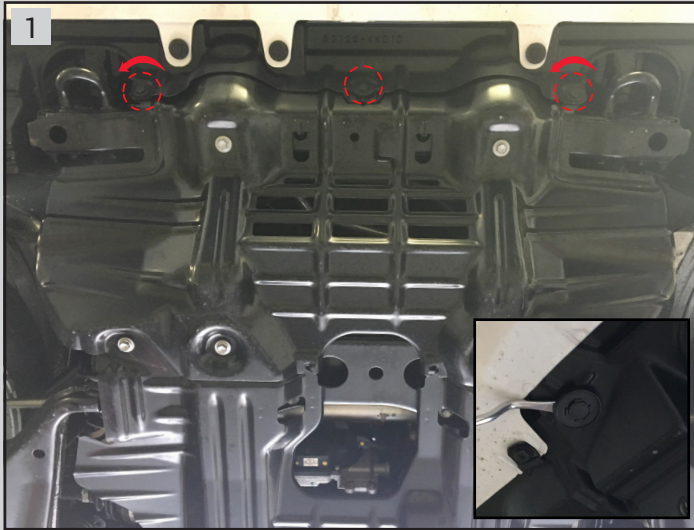

Remove 2 bolts and the middle clip

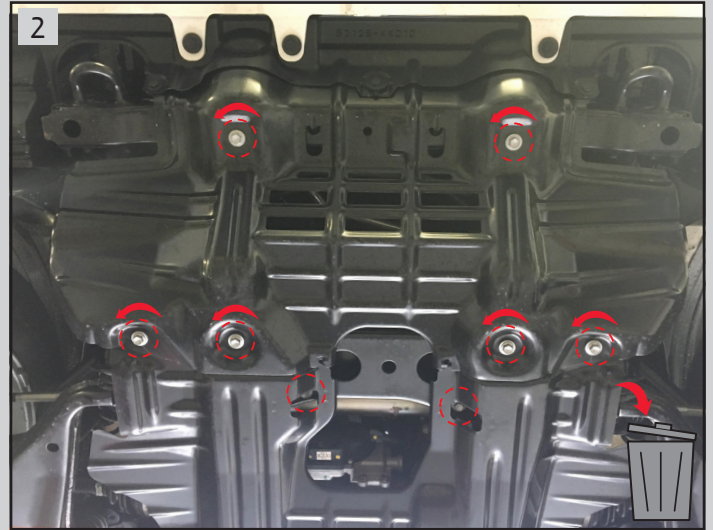

Remove 8 bolts and dispose the original plate

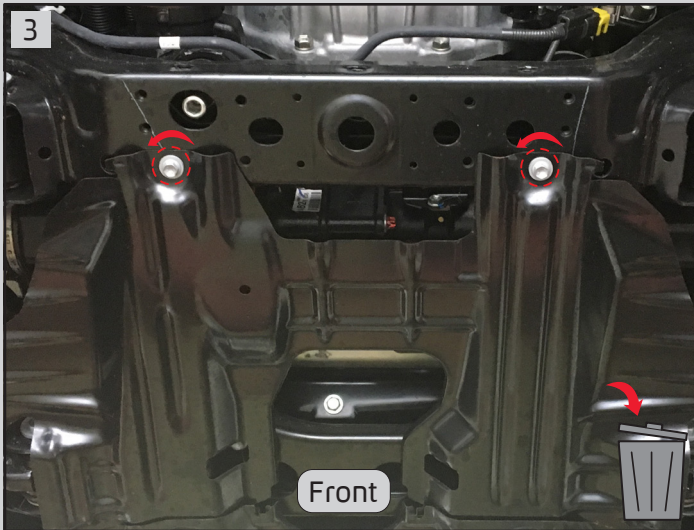

Remove 2 bolts and dispose the original plate



Connect plate (A) to the original screwing using 6 hex bolts (B) with spring washer (c) and pocket washer (D). Tighten the bolts

